

Adaptation of Walbro Diaphragm Carburetors for Slow and Smooth Idle and Progressive Midrange RPM

For the most part, a carburetor that comes out of the box, unless it was designed and built for a one-of-a-kind engine, will need some changes made to fit the needs of the engine. These changes are also needed due to the type of fuel & oil that will be used.

From there it goes on up the ladder in stages to fit various needs and levels of performance; These changes for high performance are called *Blueprinting*.

Although *stock* WG8 carbs are being used on powered paraglider and hang glider harnesses, they were not specifically designed and fabricated for the Radne Raket 120. The fact is that the balance of air to fuel ratio is not proportionate under certain circumstances, so it has to be *made* proportionate depending on the engine it is mounted on. Don't think of this so much a 'modification' or full 'blueprinting' but just an adaptation of the Walbro carb to your particular engine needs.

A lot of pilots don't really understand carburetors, but the Walbro is a very simple carb, and to get it to perform properly, it's just getting a balance and combination of needle jets, Metering Lever height, reseat pressure and for full diagnostic purposes: pop-off pressure.

In order to follow these instructions (for cleaning & tune up) it is essential to first learn the names of the carburetor's parts and if possible, their function. I recommend to start by understanding the general principles on how the Walbro metering system works:

Walbro Service Manual (PDF 5.8MB) <http://www.wind-drifter.com/technical/WalbroServiceManual.pdf>

This article is divided on two basic sections: The first is Cleaning & Tuning and the second is the Modification for Smooth and Slow Idle. Since you have to take the WG8 carb off your engine, let's start with a cleaning and calibration:

There are two different Walbro repair kits available: The **K12-WG** has almost all the parts, including needle, fuel strainer screens, etc. Note that it does not contain a Metering Spring, it is sold separately as Walbro part # 98-320-7 (OEM # 503 28 12-18). The **D12-WG** kit contains only the gaskets and diaphragms.

Place the carb on a clean surface and remove both end caps. With the metering diaphragm removed, you can push on the lever in the center of the carburetor body to see how things work. The lever is connected to a main needle valve, and this is what meters the desired fuel pressure to the high- and low-speed jets. The rivet in the center of the diaphragm pushes down on the lever, and this, in turn, lifts the main needle valve out of its seat. Fuel fills the cavity, and the venturi effect in the carb's throat pulls fuel into the airstream.


Note where the parts go and ensure it is squeaky clean inside. Dirt is the most common cause of carburetor problems! Using a carburetor cleaning solution, be sure to clean the Inlet Needle's (a.k.a: main needle valve, needle, metering valve, metering needle, etc.) rubber tip & seat as well as the internal wire mesh fuel filter. Compressed air is the best method to clean all orifices without leaving fibers from commonly used items such as a cotton swabs.

Pop-Off Pressure and Inlet Valve Reseat Pressure

The Metering System is very simple: It consists of a pivoting lever working like a seesaw with a spring on one side and an Inlet Needle (with a red rubber tip valve) on the other.

If you don't have the pressure-testing tool, don't worry, just make sure you clean the carb, blow it dry and use new diaphragms & gaskets and set the Metering Lever height; The resulting pop-off and reseat pressure will be functional as long as you don't damage or modify the Metering Spring:

- 1) Don't deform or cut the small Metering Spring. If in doubt, replace it with Walbro part Walbro part # 98-320-7 (OEM # 503 28 12-18; WG8 carburetor).
- 2) Set the Metering Lever at the correct height as explained below.

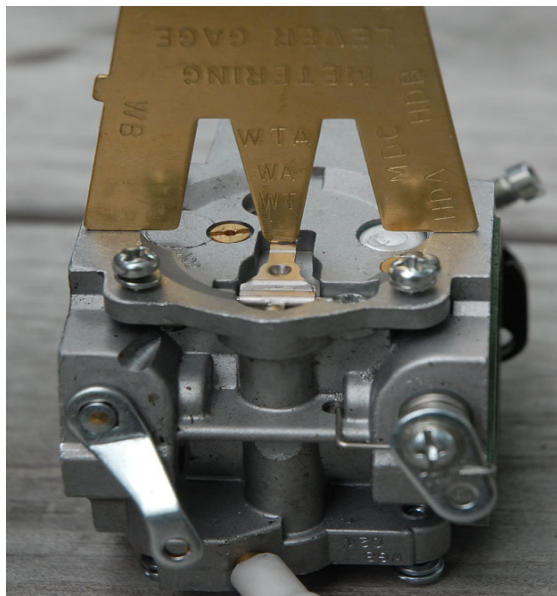

Setting the Metering Lever height. Photo by Richard Cobb.

The height of the Metering Lever on any diaphragm carburetor is critical for controlling when and how far the inlet needle 'pops' open, thus configuring the engine's acceleration characteristics. If the Metering Lever height is set too high, it may create a rich condition, while a Metering Lever set too low may create a lean condition. The height of the Metering Lever must be **1.7 mm or 1.067" (WG carbs) and 1.45 mm or 0.057" (WB carbs)** below the edge of the carburetor body. Walbro sells a calibrated brass plate gage to be used as depth meter (Walbro item # 500-13-1) available through most power tool shops. I recommend you also take a look at Wind-Drifter's photos on this: <http://www.wind-drifter.com/technical/wg8walbro.htm>)

Pop-off pressure calibration: Pop-off is the pressure at which the Inlet Valve 'pops' open on demand and allows fuel to travel toward the needle jets. It is important to understand the difference between the measured pop-off pressure during a bench test and the actual functional pop-off pressure of a running engine; In a running engine, the pop-off pressure will happen on demand and it depends on various dynamic factors not present during a simple bench test. Factors such as fuel demand and atmospheric pressure determine the actual pop-off pressure in a running engine. The one thing we must do regarding setting the pop-off pressure, is setting the correct and critical Metering Lever height. Since we are pressure-testing the carb while subjected to an abnormal (non-running) situation, the measured pop-off pressure will not be the same as in a running engine, but this test can be used for diagnostic purposes: For example, if the pop-off pressure during the bench test happens at 30 PSI or more, it is too high, and it is indicative of sticky diaphragm flap valves or a sticky Inlet Valve seat.

If you wish to actually pressure-test a Walbro carburetor, prime it as usual and then simply remove the fuel supply line and attach the Walbro pressure tester onto its fuel inlet fitting. [Walbro's pressure tester part # 57-11 ; \$57.42 USD]. Pump air into the system and watch the gage needle drop when the Inlet Needle pops off its seat (opens). You want a pop-off pressure between **14 and 25 PSI**

To adjust the pop-off pressure, run a depth gage across the Metering Lever, calibrate the gap to **1.7 mm (WG carbs) and 1.45 mm (WB carbs)** below the edge of the carburetor body, no gasket, but does not restrict the gage from moving across it. If you go higher in the Lever, it will give a lot more fuel and it can become a little hard to start because the Inlet Valve will not be able to close in time.

When reassembling, first place the thick Metering gasket on the carb body, followed by the thin Metering Diaphragm. If the replacement parts have the tang & groove metering system, make sure the Metering Lever clips into the Metering Diaphragm.

Inlet Valve Reseat Pressure Calibration: The normal position of the Inlet Valve is closed (the metering spring keeps it closed). The Walbro manual states that calibrating its reseat (closing) pressure is far more important than pop-off pressure! When the Inlet Valve gets unseated (pops open) under fuel demand, it must then **reseat (close) at 10- 12 PSI**. You'll know by watching the pressure drop on your pressure gage; After pop-off happens, the pressure drop should end and remain steady at 10 PSI or above. It should never drop below 10 PSI. This will ensure that fuel pump pressure does not override (push open) the Inlet Needle Valve since the fuel pump produces 5-7 PSI.

To increase the Inlet Valve reseat pressure, gently stretch the Metering Spring, this increases the force

on the inlet needle seat (shuts tighter). To decrease the reseal pressure, carefully compress the metering spring (careful not to lose it!). **NEVER CUT IT!!**. If in doubt, replace the Metering Spring (Walbro part # 98-320-7, OEM # 503 28 12-18; WG8 carb).

The test pressure gage should remain **steady** at about 10 - 12 PSI when the Metering needle valve (Inlet Valve) reseals. A leaky carburetor is indicated if the pressure continues to drop. According to the Walbro pressure pump manual, a continuing pressure drop can indicate:

*Flawed or dirty Inlet Valve seat.

*Worn Inlet Valve rubber tip.

*Internal crack of porosity in body casting or fuel pump body casting.

*Leaking fuel pump gasket or fuel pump diaphragm .

Important Notes on Carb Re-assembly:

1) When re-assembling, you must place the gaskets and diaphragms in this precise order:

Fuel pump side: Pump diaphragm on the carb body, followed by the gasket and then the lid.

Metering side: Metering gasket on the carb body, followed by the metering membrane and then the lid.

2) When re-assembling, make sure the Metering Lever clips into the Metering Diaphragm, or the engine just won't go. This does not apply if you are using the metering kit that does not incorporate the lever & diaphragm clip.

3) WB series carbs have an internal Circuit Plate next to the metering system. The plate's gasket goes next to the carb body, followed by the membrane and last the plate.

Modification:

(Acknowledgement to Scott Travers for sharing this technique that was part of Mr. Travers' engine maintenance clinic.)

Once you've done this basic cleaning and calibration homework, you can relax as you've done the difficult part. Here's how to make a Walbro equipped engine start *hot or cold* with a smooth and progressive midrange: Look at the throttle butterfly (a.k.a.: throttle valve, throttle plate, throttle flap) in the carb throat and you will see there a notch on the butterfly's outer edge; Some flaps have the small indentation and some do not. It should be on the adjustment needle side of the carb close to the lowest pick-up hole (idle).

Almost appears as though someone accidentally nicked the butterfly. Here's the problem. That little nick in the butterfly plate accomplishes the entire airflow for the idle circuits. This is why your idle stop screw and spring are mashed all the way in while your Low speed screw open a mere one turn out. Your engine is starving for air while you've cut its idle fuel supply to nothing.

Your High-speed needle in the WB carb series is open at 1 to 3/4 turn for top end and your Low speed needle is open 1/8 turn. That is a major expanse of territory with no midrange coverage. The Low jet is too low to cover midrange while the High jet is too high to do the same.

This is an old technique used in go-karting that can be applied to slide and butterfly carbs alike for specific tuning needs:

Note the exact position of the throttle butterfly plate and lower jet apertures, remove the plate and use a 6mm diameter Dremel grinding stone (#932) or rat tail file to cut away a small half moon so that the notch is aligned with the idle pick up hole (the lowest hole in the carb throat). For testing purposes, I purchased a few throttle plates and I started out by cutting a notch of about 0.2mm deep and gradually increasing its depth up to 4mm and after several static tests I settled for a 2.0 mm deep notch for the Radne Raket 120 with either a WG or WB series carb. Alternatively, you can also grind a somewhat shallower flat straight cut instead of a curved notch.


Throttle plates modified for correct idle air requirements of a Raket 120: Left: WB-42; Right: WG8



The next two pictures are of a WB-32 modified by Mr. Scott Travers for use on a Solo 210 engine. These two photos were taken from both ends of the same carb:



WB32 carb modified for use on a Solo 210 engine. Note The Solo's need for more air at idle as compared with the Raket 120 using a similar carburetor. (Photo by Rick Grim)

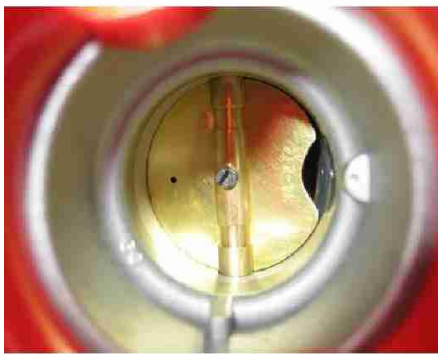

IMPORTANT: Wherever the idle pickup holes are in your carb throat, make the plate notch in front -or aligned- to them, and make sure you do not grind any more than 2mm. If you grind away too much, the engine will simply have a fast uncontrolled idle that cannot be adjusted with the idle stop screw or the Low speed needle (buy a \$0.79 cent spare butterfly plate just in case: Throttle Valve, Walbro # 34-305); For Walbro distributors in your country or state click [HERE](#).

When you place the throttle flap back, ensure it closes completely before tightening it to its shaft, and don't push too hard while tightening it or you will bend the delicate brass shaft. Add one small drop of LockTite to its central screw. Mount the carb on the engine and make sure the throttle cable permits the complete throttle assembly to open and return "all the way" against the stop! With this done you will now open the Low speed needle 1 turn (WG8); [WB series: Open the Low speed needle 1 turn and open the High speed needle 1/2 turn to start out] and back out that mashed idle stop screw to where it's supposed to be: about half way out.

Again, check that the complete throttle assembly works correctly and the throttle flap **closes completely**

and freely. Also test the choke mechanism for free movement. Start your engine and allow it to warm up at low/mid RPM.

High Speed Needle Adjustment

If you have a WB series carb, next make a high speed run and adjust your High speed needle at high RPM. The ideal high speed mixture is the richest setting that still permits strong acceleration up to peak RPM. With this in mind, it is always wise to start out slightly over rich and slowly lean the mixture out. If the high speed mixture is too lean, you'll experience weak or "lazy" mid range acceleration. You'll eventually find a narrow adjustment range where peak rpm operation seems unchanged. However, within this range, there should be a noticeable difference in mid to high range acceleration. Finding the setting within this range that gives the best "middle through high range acceleration" usually requires patience to train your hearing. Once you are satisfied with the settings, make a full throttle run of no more than one minute and then take a [spark plug reading](#). Remember that a [spark plug reading is a must!](#) Repeat the High-speed circuit adjustment until your top end is smooth and plug reading is light tan in color.

Spark Plug Reading

Radne switched the recommended spark plug from Nipponderoso to the NGK BPH7A with the electrode gap set at 0.6 mm. Determining proper fuel mixture by inspecting the color and condition of the spark plug can be very helpful in situations where the engine is being operated constantly at full RPM under full load. Using a NEW and calibrated spark plug is required: At the end of the full throttle running, the throttle should be chopped and the kill button pushed *simultaneously*; If the engine is run at partial throttle for even 5 seconds after the full throttle run, the plug reading will be invalid. After the full throttle running, a combination flashlight/magnifying glass must be used to view the carbon deposit at the base of the porcelain - down inside the spark plug where the porcelain insulator and outer steel spark plug casing meet. A ring of dark brown at the base of the porcelain denotes ideal fuel mixture, light brown is lean, and a ring of black is over rich. This is the only area of the spark plug that accurately indicates fuel mixture. Furthermore, this reading only indicates full throttle fuel mixture. No part of the spark plug can indicate Low Speed or mid-range fuel mixture. The upper part of the spark plug porcelain (by the electrodes) is often very light or white in color, however this coloring is mostly affected by additives in the gasoline and oil. The coloring of the end of the porcelain in no way indicates appropriate fuel mixtures of any throttle range.

Low Speed Needle Adjustment

With the engine completely warmed up, apply about 35% throttle or as fast as 4500 - 5000 RPM. Turn the low speed mixture screw in or out in 1/8 turn increments. As you get closer to the ideal setting, the engine RPM will increase. At the ideal mixture setting, turn in a richer or leaner direction will cause a rough idle and cause the engine to die. To confirm your perfect low speed mixture setting, touch the kill button during idling and then restart the engine about ten seconds later. The engine should restart instantly and idle steadily without touching the throttle. Avoid running an over rich Low Speed mixture screw setting in an effort to cure a mid range hesitation = lean condition.

Idle Adjustment

Once the engine is operating at normal temperature, you can now adjust the idle stop screw till you achieve a smooth idle.

What did all this achieve?

You now allowed enough airflow for the engine to run properly at idle. You allowed for a smooth controlled idle since the Low speed mixture is finally balanced.

By increasing Low Speed mixture volume you also decrease the midrange carry-over lag because the Low Speed jet progressively transfers control of the mixing action over to the Mid and High speed mixture circuit. Your Raket 120 never had it so good so it will allow you to power down to idle and taste the thermal you just found, and even lock the propeller without the inconvenience of of stalling the engine and suffering a tough restart.

A point to consider is that if you can get your engine running at an iffy idle at about 2000-2100 RPM, then it will be at *Nirvana* idling at 2500-2600 RPM without engaging the centrifugal clutch.

How does notching the butterfly (allowing more air to pass) differ functionally from limiting the butterfly's closure with the idle stop screw?

Balance of air to fuel ratio is not proportionate within the mid-range or even at idle on most Walbro carbs. It has to be *made* proportionate depending on the engine it is mounted on.

You increase airflow across the butterfly and increase Low jet flow at idle, thus you achieve a smoother mid-range and lower idle speeds. You cannot compensate for this with merely opening the butterfly. Your objective is to increase Low speed jet action along with more air; In other words, the flow through the notch (when the butterfly is closed) is directly across the jet holes rather than around the entire periphery of an almost-closed butterfly.



Edited and adapted by Gerry Farell; Full credit and appreciation to Scott Travers for sharing this technique that was part of Mr. Travers' engine maintenance clinic.

For carburetor tuning details, it helps to learn the names of the carburetor's parts and their function. I highly recommend to start by understanding how the Walbro metering system works:

Walbro Service Manual (PDF 5.8MB) <http://www.wind-drifter.com/technical/WalbroServiceManual.pdf>

Walbro Carburetors Troubleshooting Chart http://www.wind-drifter.com/technical/walbro_chart.jpg

*Alex Varv's articles <http://www.aerocorsair.com/id29.htm> are clear and very useful, but never cut the metering spring.

[HOME](#)



